

# PRODUCT CATALOG

Vina International Holdings LTD



Tel:86-755-89395821;89395119;89395801;89395802

Fax:86-755-89395062

Email:Sales@vinacn.com

Web:www.vinacn.com

Add:101-2,201-2,D building.No.26 East Chang Long RD,FuCheng A o,  
Pinghu Town,LongGang District,ShenZhen China



## 2025

20 YEARS OEM&ODM SERVICE TO CLIENTS

[www.vinacn.com](http://www.vinacn.com)



20th Anniversary Edition

# ENTERPRISE PROFILE



## ABOUT US

Vina International Holdings LTD

### Vision

Become the leader of safe and intelligent charging equipment

### Mission

Make smart charging devices serve every home

VINA International Holdings Ltd was founded in 2005 with a focus on the smart fast charging field. Over the past 21 years, VINA has serving over 3,000 brand customers from 65 different countries. With a commitment to innovation and quality, VINA has achieved global recognition for its cutting-edge products, including the world's first 200W and 240W PD charger.

In order to better serve its customers, VINA is dedicated to product innovation and continuously expanding its product offerings. The company places a strong emphasis on research and development, consistently investing in new technologies and products. This commitment to innovation, combined with VINA's focus on quality, has made it a trusted partner for businesses around the world.

VINA is committed to building strong, lasting partnerships with its clients, offering a wide range of products and services that are designed to meet their specific needs. Whether you are looking for a reliable charger for your personal devices or for your business, VINA has the expertise and experience to deliver. With a focus on delivering the highest level of quality and customer satisfaction, VINA is the ideal business partner for companies looking for a win-win cooperation.



21 YEARS

3000+ CUSTOMERS

65 COUNTRIES

VINA is committed to building strong, lasting relationships with its customers, offering a wide range of products and services to meet their specific needs. Whether you are looking for a reliable charger for your personal device or for your business, VINA has the expertise and experience. With a focus on providing the highest level of quality and customer satisfaction, VINA is the ideal business partner for companies seeking win-win cooperation.



**Verified**

Supplier verified on-site by SGS Group  
This seller is assessed, certified, authenticated and/or inspected by SGS Group.




## Customer growth

Our business covers 60+ countries and regions in the world (Europe, the United States, South Korea, Japan, Australia, South America, etc.), serving more than 1000 customers.

Since 2019, the number of our customers has increased by more than 15%, and the transaction amount of our customers has increased by more than 50%. Our customers include but are not limited to brand merchants, e-commerce sellers, supermarket chains, channel distribution, consumer electronics suppliers, engineering service providers, etc.



learn more us to [www.vinacn.com](http://www.vinacn.com)

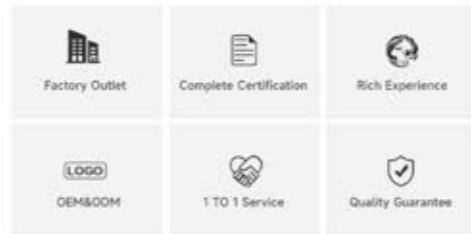

## Customers Service

- Provide customer's 2 years warranty guarantee.
- Provide 1% spare parts
- OA payment is acceptable

## Management Standard

- Aims: cost down by control.
- Objective: Share the profit with our customers.
- Slogan: Quality first, Customer First, Honesty First.



Quality Control-We perform strict inspection standard based on ISO 9001  
Our products are checked throughout the producing process.  
•IQC: 6 conscientious staff with good training inspect each material.  
•PQC: 6 experienced staff inspect semi finished articles during producing process, test function one by one with professional machine and software.  
•FQC: 5 candid staff do final inspection for all finished products before shipment.  
Reputation --- Repeat Order  
•90% of our clients kept placing repeated orders in the last two years  
•Over 65% of our clients kept placing repeat orders in the last three years



## The 2025 new product

### 65-140W Screen Display Fast Charging Series



#### **140 W** PD-136

##### 140W 2C1A Color Display Travel Charger

Input:100-240Vac 50/60Hz 2A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A, 28V/5A,PPS:3.3V-21V/5A(Max:140W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A PPS:3.3V-21V/5A(Max:100W)  
 USB-A: 5V/3A,9V/2A,10V/2.25A,12V/1.5A(Max:22.5W)  
 USB-C1+USB-C2:100W+35W,  
 USB-C1+USB-A:100W+22.5W,  
 USB-C2+USB-A:100W+22.5W,  
 USB-C1+USB-C2+USB-A:65W+45W+18W

#### **100 W** PD-135

##### 100W 2C1A Color Display Travel Charger

Input:100-240Vac 50/60Hz 1.5A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A PPS:3.3V-21V/5A(Max:100W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A PPS:3.3V-21V/5A(Max:100W)  
 USB-A: 5V/3A,9V/2A,10V/2.25A,12V/1.5A(Max:22.5W)  
 USB-C1+USB-C2:65W+35W, USB-C1+USB-A:65W+22.5W,  
 USB-C2+USB-A:65W+22.5W  
 USB-C1+USB-C2+USB-A:45W+30W+22.5W

#### **70 W** PD-134

##### 70W 2C1A Color Display Travel Charger

Input:100-240Vac 50/60Hz 1.8A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W,  
 USB-C1+USB-A:25W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W

#### **65 W** PD-133

##### 65W 2C1A Color Display Travel Charger

Input:100-240Vac 50/60Hz 1.5A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W,  
 USB-C1+USB-A:45W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W

#### **45 W** PD-132

##### 45W 2C1A Color Display Travel Charger

USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A PPS:3.3V-11V/5A(Max:45W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A PPS:5V-11V/5A(Max:45W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:25W+20W,  
 USB-C1+USB-A:25W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:25W+15W



#### PD-063 B/C/D

PD3.0 100W  
100W GaN PD Charge

Input:100V-240V-50/60Hz,1.5A  
 USB-C1 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
 USB-C2 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
 USB-C3 Output:3.3-11V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
 USB-A Output:4.5V/5A,5V/4.5A,5V/3A,9V/3A,12V/2.5A,20V/1.5A;  
 USB-C1+USB-C2 /C3 Output:65W+35W;  
 USB-C1/C2+USB-A Output:65W+30W;  
 USB-C2+USB-C3 Output:65W+35W;  
 USB-C3+USB-A Output:5V/3A(15W);  
 USB-C1+USB-C2+USB-C3 Output:45W+35W+20W;  
 USB-C1+USB-C2+USB-A Output:45W+35W+18W;  
 USB-C1/C2+USB-C3+USB-A Output:65W+15W;  
 USB-C1+USB-C2+USB-C3+USB-A Output:45W+35W+15W;  
 Total Output Power:100W MAX;  
 Size:77\*61\*29mm  
 Weight:194g

3C1A



#### PD-121PT

PD3.0 140W  
140W PD GAN charger

Input:100-240Vac 50/60Hz 2A MAX  
 Output:USB-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,PPS:3.3V-21V/5A(100W)  
 USB-C2:5V/3A,9V/2.22A,12V/1.67A(20W)  
 USB-C3:5V/3A,9V/2.22A,12V/1.67A(20W)  
 USB-C4:5V/3A,9V/2.22A,12V/1.67A(20W)  
 USB-A:5V/3A,9V/2A,12V/1.5A(18W)  
 USB-C2+USB-C3:5V/3A(15W)  
 USB-C4+USB-A:5V/3A(15W)  
 USB-C1+USB-C2/C3+USB-C4/A:100W+20W+20W  
 Total Power: 140W

4C1A



#### PD-100PT

PD3.0 150W  
150W PD GAN charger

Input:200-240V,50/60Hz,1.8A  
 USB-C1 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
 USB-C2 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
 USB-C3 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
 USB-A Output:5V/3A,9V/2A,12V/1.5A;  
 USB-C1+USB-C2 Output:100W+45W; USB-C1+USB-C3 Output:100W+45W;  
 USB-C1+USB-A Output:100W+18W; USB-C2+USB-C3 Output:100W+45W;  
 USB-C2+USB-A Output:100W+18W; USB-C3+USB-A Output:100W+18W;  
 USB-C1+USB-C2+USB-C3 Output:65W+65W+20W;  
 USB-C1+USB-C2+USB-A Output:65W+65W+18W;  
 USB-C1+USB-C3+USB-A Output:65W+65W+18W;  
 USB-C2+USB-C3+USB-A Output:65W+65W+18W;  
 USB-C1+USB-C2+USB-C3+USB-A Output:65W+45W+20W+18W  
 Total Output:150W MAX; Size:86\*61\*29mm

3C1A



#### PD-115PT/B

PD3.1 140W  
140W PD GAN charger

Input:100-240V-50/60Hz,1.8A  
 USB-C1 Output:3.3V-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A;  
 USB-C2 Output:3.3V-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A;  
 USB-C3 Output:3.3V-11V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
 USB-A Output:4.5V/5A,5V/4.5A,5V/3A,9V/3A,12V/2.5A,20V/1.5A;  
 USB-C1+USB-C2/C3 Output:100W+35W;USB-C1/C2+USB-A Output:100W+30W;  
 USB-C2+USB-C3 Output:100W+35W;USB-C3+USB-A Output:15W(5V3A);  
 USB-C1+USB-C2+USB-C3 Output:65W+45W+30W;  
 USB-C1+USB-C2+USB-A Output:65W+45W+30W;  
 USB-C1/C2+USB-C3+USB-A Output:100W+15W(5V/3A);  
 Total Output Power:USB-C1 65W+USB-C2 45W+USB-C3+USB-A 15W(5V/3A);

PD 3.1 3C1A



**Same size, more power**  
35-165W different power more options



**PD-120**  
**PD3.1 165W**  
165W PD GAN charger

Input:100-240Vac 50/60HZ 2A MAX  
USB-C1 Output:3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A;  
USB-C2 Output: 3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A;  
USB-C3 Output: 3.3V-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A Output: 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A;  
USB-C1+USB-C2/C3 Output:100W+65W;  
USB-C1/C2+USB-A Output: 100W+30W;  
USB-C2+USB-C3 Output:100W+65W;  
USB-C3+USB-A Output: 15W (5V3A);  
USB-C1+USB-C2+USB-C3 Output:65W+65W+30W;  
USB-C1+USB-C2+USBA Output:65W+65W+30W;  
USB-C1/C2+USB-C3+USBA Output:100W+15W(5V/3A);  
USB-C1 65W+ USB-C2 45W+USB-C3+USB-A 15W(5V/3A);  
Total Output Power: 165W  
Size:72\*72\*31mm

3C1A



**PD-131**  
**PD3.0 100W**  
100W PD GAN charger

Input:100-240Vac 50/60HZ 1.6A MAX  
USB-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,PPS:5V-21V/5A(100W)  
USB-C2:5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,PPS:5V-21V/5A(100W)  
USB-A:5V/3A,9V/3A,10V/2.25A/12V/2.5A(30W)  
USB-C1+USB-C2:65W+35W,PPS:(3.3-11V/3A);  
USB-C1+USB-A:65W+30W  
USB-C2+USB-A:5V/3A(15W)  
USB-C1+USB-C2+USB-A:65W+15W  
Total Power: 100W  
Size:64.22\*57.38\*31.5mm  
Weight:200g±10g

2C1A



**PD-119**  
**PD3.0 100W**  
100W PD GAN charger

Input:100-240Vac 50/60HZ 1.5A MAX (无PFC)  
USB-C1 Output: 3.3-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C2 Output: 3.3-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C3 utput: 3.3-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A Output: 4.5V/5A,5V/4.5A,5V/3A,9V/3A,12V/2.5A,20V/1.5A ;  
USB-C1+USB-C2 /C3 Output: 65W+35W; USB-C1/C2+USB-A Output: 65W+30W;  
USB-C2+USB-C3 Output: 65W+35W; USB-C3+USB-A Output: 5V/3A (15W) ;  
USB-C1+USB-C2+USB-C3 Output: 45W+35W+20W; USB-C1+USB-C2+USB-A  
Output: 45W+35W+18W; USB-C1/C2+USB-C3+USB-A Output: 65W+15W;  
USB-C1+USB-C2+ USB-C3+USB-A Output: 45W+35W+15W;  
Total Output Power: 100WMAX; Size:63\*63\*31.5mm

3C1A



**PD-118**  
**PD3.0 70W**  
70W PD GAN charger

Input:100-240Vac 50/60HZ 1.6A MAX  
USB-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A,PPS:3.3V-11V/5A(70W)  
USB-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A,PPS:3.3V-11V/5A(70W)  
USB-A:5V/3A,9V/3A,10V/2.25A/12V/2.5A(30W)  
USB-C1+USB-C2:45W+25W  
USB-C1+USB-A:45W+22.5W  
USB-C2+USB-A:5V/3A(15W)  
USB-C1+USB-C2+USB-A:45W+15W  
Total Power: 70W  
Size:53.9\*53.9\*31mm

2C1A



**PD-122**  
**PD3.0 48W**  
48W GaN PD charger

Input:100-240Vac/1.5A(Max)  
Output: USB-C1:PPS:3.3-11V/4.05A;5V/3,9V/3A,12V/3A,15V/3A,20V/2.25A(Max:45W)  
USB-A: 5V/3A,9V/2A,12V/1.5A(Max:18W)  
USB-C1+USB-A:30W+18W  
Total Output:48W

1C1A



**PD-122B**  
**PD3.0 48W**  
40W GaN PD charger

Input:100-240Vac/1.5A(Max)  
Output: USB-C1: PPS:3.3-11V/4.05A;5V/3,9V/3A,12V/3A,15V/3A,20V/2.25A(Max:45W)  
USB-C2: PPS:3.3-11V/4.05A;5V/3,9V/3A,12V/3A,15V/3A,20V/2.25A(Max:45W)  
USB-C1+USB-C2:30W+18W  
Total Output: 48W

2C



**PD-123**  
**PD3.0 35W**  
35W GaN PD charger

Input:100-240Vac/0.8A(Max)  
Output: USB-C1:  
PPS:3.3-11V/3A;5V/3,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A(Max:35W)  
USB-A: 5V/3A,9V/3A,12V/2.5A,20V/1.5A(Max:30W)  
USB-C1+USB-A:5V/3A(Max:15W)  
Total output:35W

1C1A



**PD-123B**  
**PD3.0 35W**  
35W GaN PD charger

nput:100-240Vac/0.8A(Max)  
Output: USB-C1:PPS:3.3-11V/3A;5V/3,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A(Max:35W)  
USB-C2:PPS:3.3-11V/3A;5V/3,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A(Max:35W)  
USB-C1+USB-C2:5V/3A(Max:15W)  
Total output:35W

2C



## PD-577

PD3.1 140W  
140W PD GAN charger

Input:100V-240V~50/60Hz 2.1A Max  
PD3.1 C1/C2 : 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A (140W)  
PPS: 3.3V-21V/5A  
C3 : 5V/3A, 9V/2.22A, 12V/1.67A (20W)  
USB-A : 5V/3A, 9V/3A, 12V/1.5A (18W)  
C1+C2 : 65W+65W C1+C3 Output: 100W+20W  
C2+C3 : 100W+20W C1+USB-A Output: 100W+18W  
C2+USB-A Output: 100W+18W C3+USB-A Output: 5V/3A  
C1+C2+C3 Output: 65W+45W+20W C1+C2+USB-A Output: 65W+45W+18W  
C1+C3+USB-A Output: 100W+5V/3A C2+C3+USB-A Output: 100W+5V/3A  
C1+C2+C3+USB-A Output: 65W+45W+5V/3A  
Total Output: 140W  
Plug can be replaced: US/EU/UK/AU/KR  
Size: 73\*65\*30mm  
Weight: 300G±10g

PD 3.1E 3C1A



## PD-063B/D

PD3.0 100W  
100W GaN PD Charge

Input:100V-240V-50/60Hz,1.5A  
USB-C1 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C2 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C3 Output:3.3-11V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A Output:4.5V/5A,5V/4.5A,5V/3A,9V/3A,12V/2.5A,20V/1.5A;  
USB-C1+USB-C2 /C3 Output:65W+35W;  
USB-C1/C2+USB-A Output:65W+30W;  
USB-C2+USB-C3 Output:65W+35W;  
USB-C3+USB-A Output:5V/3A(15W);  
USB-C1+USB-C2+USB-C3 Output:45W+35W+20W;  
USB-C1+USB-C2+USB-A Output:45W+35W+18W;  
USB-C1/C2+USB-C3+USB-A Output:65W+15W;  
USB-C1+USB-C2+USB-C3+USB-A Output:45W+35W+15W;  
Total Output Power:100W MAX;  
Size:77\*61\*29mm  
Weight:194g

3C1A



## PD-604

PD3.0 67W  
67W A+C GaN PD Charger

Input:100-240 V-50/60 Hz 1A-Max  
Output : TYPE-C1:5V/3A, 9V/3A, 10V/2A ,12V/3A, 15V/3A,  
20V/3.5A(70WMax), PPS:3.3V-21V/3A  
Output:USB A 5V/3A, 9V/2A, 10V/2.25A 12V/1.5A  
Output: C+A 45W+15W  
Size:38.5\*40\*50.8mm

1C1A



## PD-099PT/C

PD3.0 100W  
100W PD GAN charger

Input:100V-240V-50/60Hz,1.5A  
USB-C1 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C2 Output:3.3-21V/5A;5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-A Output:4.5V/5A,5V/4.5A,5V/3A, 9V/3A,12V/2.5A,20V/1.5A;  
USB-C1+USB-C2 Output:65W+35W;  
USB-C1+USB-A Output:65W+30W;  
USB-C2+USB-A Output:65W+30W;  
USB-C1+USB-C2+USB-A Output:45W+35W+18W;  
Total Output Power:100W MAX;  
Size: 72\*61\*29.5mm  
Weight:207g

2C1A



## PD-060B/C

PD3.0 65W  
65W PD GAN charger

Input:100-240V-50/60Hz,1.5A  
USB-C1/C2 :3.3V-11V/3A,5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A(65W Max)  
USB-A Output:4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A(30W Max)  
USB-C1+USB-C2 Output:45W+18W(63W Max)  
USB-C1+USB-A Output:45W+18W(63W Max)  
(USB-A/C2 Output:5V/3A,9V/2A,12V/1.5A)  
USB-C2+USB-A Output:5V/3A(15W Max)  
USB-C1+USB-C2+USB-A Output:45W+5V/3A(60W Max)  
Total Output:65W Max  
Size: 58.6\*29.5\*47mm  
Weight: 113g

2C1A



## PD-616

PD3.0 65W  
65W PD GaN charger

Input : AC 100-240V;50/60Hz 1.5A  
USB-C:DC 5V3A 9V3A 12V3A 15V3A 20V3.25A  
ACharging Protocol:  
USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2  
Dimensions(mm): 56.5\*46\*18mm(LWH)  
Weights about:86.5g

1C



## PD-615

PD3.0 65W  
65W PD GaN charger

Input : AC 100-240V;50/60Hz 1.5A  
USB-C1/C2: 5V3A 9V3A 12V3A 15V3A 20V3.25A (65W)  
USB-C1+USB-C2: 45W+12W  
Charging Protocol:  
USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2, PPS  
USB-A: QC2.0/3.0, Apple 2.4A, BC1.2  
Dimensions(mm):56.5\*46\*18mm(LWH)  
Weights about:92g

2C



## PD-614

PD3.0 65W  
65W PD GaN charger

Input : AC 100-240V;50/60Hz 1.5A  
USB-C:DC 5V3A 9V3A 12V3A 15V3A 20V3.25A (65W)  
USB-A:DC 5V3A 9V2A 12V1.5A (18W)  
A+C;USB-A: 5V2.4A  
A+C;USB-C: 5V3A 9V3A 12V3A 15V3A 20V2.25A(45W)  
Charging Protocol:  
USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2, PPS  
USB-A: QC2.0/3.0, Apple 2.4A, BC1.2  
Dimensions(mm): 56.5\*46\*18mm(LWH)  
Weights about:90g

1C1A



## PD-137

**PD3.0 70W**  
with a pull-out wire style

Input:100-240Vac 50/60HZ 1.8A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W, USB-C1+USB-A:25W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W



2C1A



## PD-139

**PD3.0 65W**  
with a pull-out wire style

Input:100-240Vac 50/60Hz 1.5A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W,  
 USB-C1+USB-A:45W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W



2C1A



## PD-138

**PD3.0 70W**  
with a pull-out wire style

Input:100-240Vac 50/60HZ 1.8A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-C2: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A PPS:3.3V-11V/5A(Max:70W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W,  
 USB-C1+USB-A:25W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W



2C1A



## PD-140

**PD3.0 65W**  
with a pull-out wire style

Input:100-240Vac 50/60Hz 1.5A MAX  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-C1: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A PPS:3.3V-11V/5A(Max:65W)  
 USB-A: 5V/3A,9V/3A,10V/2.25A,12V/2.5A,20V/1.5A(Max:30W)  
 USB-C1+USB-C2:45W+20W,  
 USB-C1+USB-A:45W+18W,  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W



2C1A



## PD-613

**PD3.0 70W**

70W 2C1A GaN PD Charger

Input:100-240V-/Hz 1.7A  
 Output: USB-C1:(伸縮線) USB-C2  
 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20.3V/3.45A (70W Max)  
 PPS: 5-11V/4.5A  
 USB-A: 5V/3A, 9V/3A,12V/3A,20V3A (60W Max)  
 USB-C1+USB-C2: 45W+25W (70W Max)  
 USB-C1+USB-A: 45W+18W (63W Max)  
 USB-C2+USB-A: 5V3A 共享(15W Max)  
 USB-C1+USB-C2+USB-A:  
 45W (USB-C1) + 15W (USB-C2+USB-A) = (60W Max)  
 Size:54 x 50x 70.5mm  
 Color:Black/White/



2C1A



## PD-585

**PD3.0 65W**

65W PD GAN charger

Input: 100V-240V~ 50/60Hz 1.5A Max  
 C1/C2 Output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W)  
 PPS: 5V-11V/4.05A; 5V-16V/3A  
 USB-A Output: 5V/3A, 9V/3A, 12V/3A, 20V/3A (60W)  
 C1+C2 Output: 45W+20W  
 C1+USB-A Output: 45W+18W  
 C2+USB-A Output: 5V/3A  
 C1+C2+USB-A Output: 45W+15W  
 Total Output: 65W  
 Plug can be replaced: US/EU/KR  
 Size: 50\*50\*51.5mm  
 Weight: G±10g



2C1A



## PD-141

**PD3.0 65W**

with a pull-out wire style

input: 100-240Vac 50/60Hz 1.5A MAX  
 USB-C1 : PPS:5V-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A; (Max:65W)  
 USB-C2 : PPS:5V-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A; (Max:65W)  
 USB-A : 5V/3A ,9V2A, 12V/1.5A  
 USB-C1+USB-C2:45W+20W  
 USB-C1+USB-A:45W+18W  
 USB-C2+USB-A:5V/3A  
 USB-C1+USB-C2+USB-A:45W+15W



3C



**PD-612**  
PD3.0 65W  
65W PD GaN charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output : TYPE-C1/C2:5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A(65WMax),  
PPS:5V-20V/3A  
Output: USB-A :5V 3A,9V 2A,12V 1.5A  
TYPE C1+C2/A Output: 45W+ 5V/2.4A ,9V/2A,12V/1.5A (18W)  
C2+A1:5V/3A (15W) C1+(C2+A1):45W+15W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:55.5\*37\*34

2C1A



**PD-611**  
PD3.0 65W  
65W PD GaN charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output: TYPE-C1:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/3.25A(65WMax), PPS:5V-20V/3A  
USB A Output:5V/3A,9V/2A,12V/1.5A  
TYPE C+USB A Output: 45W+18W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:55.5\*37\*34

1C1A



**PD-610**  
PD3.0 65W  
65W PD GaN charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output : TYPE-C1/C2:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/3.25A(65WMax), PPS:5V-20V/3A  
TYPE C+TYPE C2 Output: 45W+18W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:55.5\*37\*34

2C



**PD-595**  
PD3.0 65W  
65W A+C GaN PD Charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output :TYPE-C1:5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A(65WMax),  
PPS:5V-20V/3A  
Output :USB-A :5V/3A, 9V/3A, 12V/2.25A, 20V/1.35A,  
Output: TYPE C+USB A C1:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/2.25A(45WMax), A: 5/2.4A 12W  
45W+12W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:86\*46\*15mm

1C1A



**PD-594**  
PD3.0 65W  
65W 2C GaN PD Charger

Input:100-240 V~50/60 Hz 1.3A-Max  
TYPE-C1/C2:5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A(65WMax),  
PPS:5V-20V/3A  
C1+C2 Output : C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A(45WMax),  
C2:5V/2.4A 45W+12W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:86\*46\*15mm

2C



**PD-603**  
PD3.0 65W  
65W PD GaN charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output: TYPE-C1:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/3.25A(65WMax), PPS:5V-20V/3A  
Color:Black/White/  
Size:55.5\*37\*34

1C



**PD-602**  
PD3.0 65W  
65W PD GaN charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output: TYPE-C1/C2:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/3.25A(65WMax), PPS:5V-20V/3A  
Output: USB-A :5V 3A, 9V 2A, 12V 1.5A  
TYPE C1+C2/A Output: 45W+ 5V/2.4A ,9V/2A ,12V/1.5A (18W)  
C2+A1:5V/3A (15W)  
C1+ (C2+A1) :45W+15W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:52\*43.8\*31.5

2C1A



**PD-596**  
PD3.0 65W  
65W PD Charger

Input:100-240 V~50/60 Hz 1.3A-Max  
TYPE-C1/C2:5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A(65WMax),  
PPS:5V-20V/3A  
C1+C2 Output : C1:5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A(45WMax),  
C2:5V/2.4A 45W+12W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:86\*46\*14.7mm

2C



**PD-597**  
PD3.0 65W  
65W PD Charger

Input:100-240 V~50/60 Hz 1.3A-Max  
Output:TYPE-C1:5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A(65WMax),  
PPS:5V-20V/3A  
Output :USB-A :5V/3A, 9V/3A, 12V/2.25A, 20V/1.35A,  
Output: TYPE C+USB A C1:5V/3A, 9V/3A, 12V/3A, 15V/3A,  
20V/2.25A(45WMax), A: 5/2.4A 12W  
45W+12W  
Total Output Power: 65W Max;  
Color:Black/White/  
Size:86\*46\*14.7mm

1C1A



### PD-092BA

**PD3.0 48W**  
48W GaN PD charger

Input: 100V-240V ~50/60Hz 1.5A MAX  
 USB-C Output : 3.3V-11V/4.05A,5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A  
 USB-A Output: 5V/3A,9V/2A,12V/1.5A  
 USB-C+USB-A=30W+18W  
 (USB-C Output: 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A)  
 USB-A Output: 5V/3A,9V/2A,12V/1.5A  
 Total output:48W (Max)  
 Size: 54\*32\*36mm  
 Weight: 80g

1C1A

### PD-092B

**PD3.0 48W**  
48W GaN PD charger

Input: 100V-240V ~50/60Hz 1.5A MAX  
 USB-C1/C2 Output :  
 3.3V-11V/4.05A,5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A  
 USB-C1+USB-C2 Output: 30W+18W  
 (USB-C1 Output: 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A)  
 USB-C2 Output: 5V/3A,9V/2A,12V/1.5A)  
 Total output:48W (Max)  
 Size: 54\*32\*36mm  
 Weight: 80g

2C

### PD-092C

**PD3.0 45W**  
45W GaN PD charger

Input: 100V-240V ~50/60Hz 1.5A MAX  
 USB-C Output: 3.3V-11V/4.05A,5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A  
 Total output:45W (Max)  
 Size: 54\*32\*36mm  
 Weight: 80g

1C

### PD-617

**PD3.0 45W**  
45W PD GaN charger

Input : AC 100~240V;50/60Hz 1.5A  
 USB-C:DC 5V3A 9V3A 12V3A 15V3A 20V2.25A (45W)  
 USB-A:DC 5V3A 9V2A 12V1.5A (18W)  
 A+C;USB-A:5V2.4A  
 A+C;USB-C:5V3A 9V3A 12V2.5A 15V2A 20V1.5A(30W)  
 Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2, PPS  
 USB-A: QC2.0/3.0, Apple 2.4A, BC1.2  
 Dimensions(mm): 49.5\*43.2\*18mm(LWH)  
 Weighs about: 79g

1A1C

### PD-618

**PD3.0 45W**  
45W PD GaN charger

Input : AC 100~240V;50/60Hz 1.5A  
 USB-C1/C2 :5V3A 9V3A 12V3A 15V3A 20V2.25A (45W)  
 USB-C1+USB-C2: 30W+12W  
 Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2, PPS  
 Dimensions(mm): 49.5\*43.2\*18mm(LWH)  
 Weighs about:79g

2C

### PD-619

**PD3.0 45W**  
45W PD GaN charger

Input : AC 100~240V;50/60Hz 1.5A  
 USB-C:DC 5V3A 9V3A 12V3A 15V3A 20V2.25A  
 ACharging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2, PPS  
 Dimensions(mm): 49.5\*43.2\*18mm(LWH)  
 Weighs about: 79g

1C



### PD-600

**PD3.0 45W**

Input:100-240V 50/60HZ 1.0A Max  
 Output:TYPE-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A(45WMax)  
 PPS:5V-11V/3A  
 Output :USB-A :A:5V/3A,9V/2A,12V/1.5A,  
 Output: TYPE C+USB A C1:5V/3A,9V/3A,12V/3A,15V/2A,20V/1.5A(30WMax),  
 A: 5/2.4A 12W  
 A+C: 30W+12W  
 Total Output Power: 45W Max;  
 Color:Black/White/  
 Size:78\*43.5\*14.5mm(Max)

1C1A



### PD-601

**PD3.0 45W**

Input:100-240 V~50/60 Hz 1.0A-Max  
 Output:TYPE-C1/C2:5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A(45WMax),  
 PPS:5V-11V/3A  
 Output: TYPE C1+TYPE C2 C1:5V/3A, 9V/3A, 12V/3A, 15V/2A,  
 20V/1.5A(30WMax), C2: 5/2.4A 12W  
 30W+12W  
 Total Output Power: 45W Max;  
 Color:Black/White/  
 Size:78\*43.5\*14.5mm(Max)

2C



### PD-513

**PD3.0 65W**  
65W PD GaN charger

Input: 100V-240V ~50/60Hz 1.5A Max  
 C1 Output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A(65W)  
 C1 PPS: PPS: 3.3-11V/5A  
 C2 Output: 5V/3A, 9V/2.22A, 12V/1.67A(20W)  
 USB-A Output: 5V/3A, 9V/2A, 12V/1.5A(18W)  
 C1+C2 Output: 45W+15W C1+USB-A Output: 45W+15W  
 C2+USB-A Output: 5V/3A C1+C2+USB-A: 45W+15W  
 Total Output: 65W  
 PC Plug can be rep  
 Size: 46\*46\*28mm  
 Weight: 119G±10g

2C1A



### PD-511

**PD3.0 30W**  
30W PD GaN charger

Input:100-240V ~ 50/60Hz 1A Max  
 USB-C Output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A(30W)  
 PPS: 3.3-11.0V/3A  
 USB-A Output: 5V/3A, 9V/2A, 12V/1.5A (18W Max)  
 Total Output: 5V3.6A  
 Plug: US/EU  
 Size:40\*32\*33MM  
 Weight: 55G±10g

1C1A



### PD-510

**PD3.0 30W**  
30W PD GaN charger

Input: 100V-240V ~50/60Hz 1A Max  
 USB-C Output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A 20V/1.5A(30W)  
 PPS: 3.3-11.0V/3A  
 Plug: US/EU  
 Size:35\*32\*33MM  
 Weight:52G±10g

1C



**PD-583**  
**PD3.0 45W**  
45W PD GAN charger

Input:100-240V~ 50/60Hz 1.2A Max  
C1/C2 Output: 5V/3A, 9V/3A, 12V/3A, 15V/2.4A, 20V/2.25A (45W)  
PPS: 3.3-11V5A  
C1+C2:Output:20w+20W  
5V/3A, 9V/1.67A, 12V/1.5A, 15V/1.2A, 20V/1A  
Total Output: 45W  
Plug can be replaced: US/EU/UK  
Size:43\*40\*32mm  
Weight:63.4g

2C



**PD-553**  
**PD3.0 40W**  
40W PD GAN charger

Input: 100V-240V~ 50/60Hz 1.2A Max  
C1/C2 Output: 5V/3A, 9V/3A, 12V/3A, 15V/2.66A, 20V/2A (40W)  
PPS: 3.3-16V/2.5A; 3.3-11V/3.65A  
C1+C2 Output: 20W+20W  
Total Output: 40W  
Plug can be replaced: US/EU/UK  
Size:42\*40\*32mm  
Weight:63.4g

2C



**PD-635**  
**PD3.0 45W**  
45W PD GAN charger

Input:100-240 V-50/60 Hz 1.2A-Max  
Output :TYPE-C1/C2:5V/3A, 9V/3A, 12V/3A, 15V/2.66A,  
20V/2.25A(45WMax),  
PPS:C1+C2: 5V3A 15W(MAX)  
PD3.0,QC2.0/QC3.0/QC4+,SCP,FCP,AFC,BC1.2,APPLE2.4APPS  
Size: 65.23\*40.29\*13.71mm

2C



**PD-593**  
**PD3.0 40W**  
with a pull-out wire style

Input:100-240V 50/60HZ 1.2A Max  
USB-C1 is stretch cable, USB-C2 is charger Type C port.  
USB-C1 :5V/3A;9V/3A;12V/3A;15V/2.66A;20V/2A (40W Max)  
PPS: 5V-11V/3A  
USB-C2 :5V/3A;9V/2.22A;12V/2A;15V/2A;20V/2A (40W Max)  
PPS: 5V-11V/3A  
C1+C2 Output : 20W+12W  
Total Output Power: 40W Max;  
Color:Black/White/  
PC Plug can be replaced :UK/US/EU  
Size:71\*31.5\*52mm



2C



**PD-086B/C**  
**PD3.0 35W**  
35W GaN PD charger

Input:100-240V 50/60Hz 0.8A Max  
USB-C Output: 5V/3A,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A  
PPS Output: 3.3-5.9V/3A,3.3-11V/3A  
QC3.0 Output:3.6V-6.5V=3A,6.5V-9V=2A,9V-12V=1.5A  
QC+PD Output:5V/3.0A  
Total Output: 35W Max  
Size: 48.76\*31\*32mm  
Weight: 68g

1A1C



**PD-086PT**  
**PD3.0 33W**  
33W GaN PD charger

Input: 100V-240V~ 50/60Hz 0.8A Max  
USB-C Output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A  
PPS: 3.3V-11V/3A  
Total Output: 33W  
Plug can be replaced: US/EU/UK  
Size: 32\*31\*31mm  
Weight: 49G±10g

1A1C



**PD-633**  
**PD3.0 30W**  
30W GaN PD charger

Input: 100-240V~50/60HZ, 1A Max  
Output USB CABLE: 5V3A 9V3A 12V2.5A 15V2A 20V1.5A(30W Max)  
PPS: 5-11V-3A  
USB-A: 5V3A 9A2A 12V1.5A(18W Max)  
(USB-CABLE+USB-A): 5V3A  
Color:Black/White/  
EU,UK,INR,AU,US  
Size: 50x45x42mm



2C



**PD-634**  
**PD3.0 30W**  
30W GaN PD charger

Input: 100-240V~50/60HZ, 1A Max  
Output USB CABLE/USB-C: 5V3A 9V3A 12V2.5A 15V2A 20V1.5A(30W Max)  
PPS: 5-11V-3A  
USB-CABLE+USB-C: 5V3A  
Color:Black/White/  
EU,UK,INR,AU,US  
Size: 50x45x42mm



2C



**PD-116PT**  
**PD3.0 35W**  
35W GaN PD charger

Input:100-240V 50/60Hz 0.8A MAX  
USB-C Output:3.3V-11V/3A,5V/3A,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A  
Total Output: 35W (Max)  
Size: 30.7\*31\*32mm  
Weight:

1C



**PD-582**  
**PD3.0 35W**  
35W GaN PD charger

Input: 100V-240V ~50/60Hz 1A Max  
USB-C1/C2 Output : USB-C 5V/3A 9V/3A 12/2.91A 15V/2.33A  
20V/1.75A(35W)  
PPS:3.3V-11V/3A  
USB-C1+C2 :5V/3.4A (17W MAX)  
Size: 43\*32\*40mm  
Weight: 60g

2C



**PD-581**  
**PD3.0 35W**  
35W GaN PD charger

Input: 100V-240V ~50/60Hz 1A Max  
USB-C 5V/3A 9V/3A 12/2.91A 15V/2.33A 20V/1.75A  
PPS:3.3V-11V/3A  
USB-A 5V/3A 9V/3A 12V/2.5A 20V/1.5A  
USB-C1+USB-A :5V/3.4A 17W (MAX)  
Size: 43\*32\*40mm  
Weight: 58.5g

1C1A



Input: 100V-240V ~50/60Hz 0.8A Max  
 USB-C Output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A (30W)  
 PPS:3.3-11V/3A 3.3-16V/2A  
 Total Output: 30W  
 PC Plug can be replaced : US/EU/UK  
 Size: 35x30x30mm  
 Weight: 50G±10g

**PD-507**  
**PD3.0 30W**

1C

Input: 100V-240V ~50/60Hz 0.6A Max  
 USB-C Output : 5V/3A, 9V/2.22A, 12V/1.67A (20W)  
 Plug : US/EU/UK  
 Size: 30x30x30mm  
 Weight: 41G±10g

**PD-506**  
**PD3.0 20W**

1C



Input: AC 100-240V-50/60Hz, 1A Max  
 Output USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15W/2A, 20V/1.5A(30W)  
 PPS: 3.3-11V/3A  
 USB-A: 5V/3A, 9V/2A, 12V/1.5A(18W)  
 USB-C+USB-A: 5V/3A(15W Max)  
 Size: 32\*33\*40mm  
 Color: White/Black Plug: EU  
 UL94 V0 fire-proof PC housing  
 Certificate: CE, ROHS, ERP

**PD-606**  
**PD3.0 30W**

1C1A

Input:100-240 V-50/60 Hz 0.5A-Max  
 Output : TYPE-C:5V3A, 9V2.22A, 12V1.67A  
 USB A: 5V3A, 9V2A, 12V1.5A  
 TYPE C+USB A 5V/3A  
 Color:Black/White/  
 Size:45\*43\*26.5MM

**PD-608**  
**PD3.0 20W**

1C1A



Input:100-240 V-50/60 Hz 0.8A-Max  
 Output : TYPE-C:5V3A,9V3A,12V2.5A,15V2A,20V1.5A  
 PPS:3.3-11V 3A ,3.3-16V 2A  
 Color:Black/White/  
 Size:45\*43\*26.5MM

**PD-607**  
**PD3.0 30W**

1C

Input:100-240 V-50/60 Hz 0.5A Max  
 Output : 5V3A, 9V2.22A, 12V1.67A  
 Color:Black/White/  
 Size:45\*43\*26.5MM

**PD-609**  
**PD3.0 20W**

1C



Input : AC 100-240V;50/60Hz 0.8A  
 USB-C:DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A(30W)  
 USB-A: DC 5V/3A, 9V/2A, 12V/1.5A (18W Max)  
 USB-A+USB-C: 5V 3A shared Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2,PPS  
 USB-A: QC2.0/3.0, Apple 2.4A, BC1.2  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:53g

**PD-620**

**30W**  
 1C1A



Input : AC 100-240V;50/60Hz 0.8A  
 USB-C:DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A(30W)  
 Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2,PPS  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:50g

**PD-622**

**30W**  
 1C



Input : AC 100-240V;50/60Hz 0.8A  
 USB-C1/C2:DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A(30W)  
 USB-C1+USB-C2: 5V 3A shared Charging Protocol:  
 USB-C1/C2: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A,BC1.2,PPS  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:53g

**PD-621**

**30W**  
 2C

Input: AC 100-240V;50/60Hz 0.6A  
 USB-C(PD): DC 5V/3A; 9V/2.77A;  
 USB-A:DC 5V/3A;9V/2A;12V/1.5A;  
 USB-A+USB-C:DC5V/3A Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2 PPS  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:52g

**PD-623**

**25W**  
 1C1A

Input: AC 100-240V;50/60Hz 0.6A  
 USB-C(PD): DC 5V/3A,9V/2.22A,12V1.67A  
 Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:48g

**PD-624**

**25W**  
 1C

Input: AC 100-240V;50/60Hz 0.6A  
 USB-C(PD): PD-C 5V/3A,9V/2.22A,12V1.67A  
 USB-A:5V3A,9V2A,12V1.5A,  
 USB-A+USB-C 5V3A Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2  
 USB-A: QC2.0/3.0, Apple 2.4A, BC1.2  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:50g

**PD-625**

**20W**  
 1C1A

Input: AC 100-240V;50/60Hz 0.6A  
 USB-C(PD): DC 5V/3A,9V/2.22A,12V1.67A  
 Charging Protocol:  
 USB-C: PD2.0/3.0, QC2.0/3.0, AFC,FCP, Apple 2.4A, BC1.2  
 Dimensions(mm): 40\*40\*17mm(LWH)  
 Weighs about:48g

**PD-626**

**20W**  
 1C



Input:100-240V- 50/60Hz 0.8A  
 USB-C OUTPUT: 5.0V/3.0A,  
 9.0V/3.0A ,12.0V/2.5A ,15.0V/2.0A, 20.0V/1.5A  
 PPS:3.3-11V/3A,3.3-16V/2A  
 USB-A OUTPUT:5.0V/3.0A, 9.0V/2.0A ,12.0V 1.5A  
 A+C OUTPUT:5.0V/3.0A  
 Total Output:30W

**PD-525A**  
**PD3.0 30W**

1C1A

Input:100-240V- 50/60Hz 0.6A  
 USB-C:5.0V/3.0A,9.0V/2.22A ,12.0V/1.67A  
 USB-A OUTPUT:5.0V/3.0A, 9.0V/2.0A ,12.0V 1.5A  
 PPS:3.3-5.9V/3A,3.3-11V/1.8A  
 A+C OUTPUT:5.0V/3.0A  
 Total Output:20W

**PD-525B**  
**PD3.0 20W**

1C1A



Input:100-240V- 50/60Hz 0.8A  
 USB-C1/C2 OUTPUT: 5.0V/3.0A,  
 9.0V/3.0A ,12.0V/2.5A ,15.0V/2.0A, 20.0V/1.5A  
 PPS:5-11V/3A,5-16V/2A  
 C1+C2 OUTPUT:5.0V 3.0A 15.0W Max.  
 Total Output:30W

**PD-526A**  
**PD3.0 30W**

2C

Input:100-240V- 50/60Hz 0.6A  
 USB-C1 OUTPUT: 5.0V/3.0A,9.0V/2.22A ,12.0V/1.67A  
 USB-C2 OUTPUT:5.0V/3.0A, 9.0V/2.0A ,12.0V 1.5A  
 PPS:3.3-5.9V/3A,3.3-11V/1.8A  
 C1+C2 OUTPUT:5.0V 3.0A 15.0W Max.  
 Total Output:20W

**PD-526B**  
**PD3.0 20W**

2C



Input:100-240V- 50/60Hz 0.8A  
 USB-C OUTPUT: 5.0V/3.0A,  
 9.0V/3.0A ,12.0V/2.5A ,15.0V/2.0A, 20.0V/1.5A  
 PPS:3.3-11V/3A,3.3-16V/2A  
 Total Output:30W

**PD-524A**  
**PD3.0 30W**

1C

Input:100-240V- 50/60Hz 0.6A  
 USB-C OUTPUT: 5.0V/3.0A,9.0V/2.22A ,12.0V/1.67A  
 Total Output:20W

**PD-524B**  
**PD3.0 20W**

1C



Input: 100V-240V ~50/60Hz 0.7A Max  
 USB-C Output: 5V/3A, 9V/2.77A, 12V/2.08A(25W)  
 PPS: 3.3V-5.9V/3A, 3.3V-11V/2.25A  
 USB-A Output: 5V3A, 9V2A, 12V1.5A (18W)  
 USB-C+USB-A: 5V3.6A  
 Total Output: 25W  
 Plug: EU/KC/UK  
 Size: 35\*32\*31mm  
 Weight: 54G±10g

**PD-680**  
**PD3.0 25W**

1C1A



Input: 100-240V 50/60Hz 0.7A Max  
 USB-C Output: 5V/3A, 9V/2.77A, 12V/2.08A(25W)  
 PPS: 3.3V-5.9V/3A, 3.3V-11V/2.25A  
 Total Output: 25W  
 Plug: EU/KC/UK  
 Size: 32\*32\*31mm  
 Weight: 53G±10g

**PD-504**  
**PD3.0 25W**

1C1A



Input: 100-240V 50/60Hz 0.5A MAX  
 USB-C Output: 5V/3A, 9V/2.22A, 12V=1.67A  
 Total Output: 20W (Max)  
 Size: 29.6\*30.6\*30.1mm  
 Weight: 40g

**PD-074/C**

**PD3.0 20W**  
 20W PD GAN charger

1C



Input: 100-240V ~50/60Hz 0.8A Max  
 USB-C Output: 5V3A, 9V2.22A, 12V1.67A  
 PPS: 3.3-5.9V/3A, 3.3-11V/2A  
 USB-A Output: 5V3A, 9V2A, 12V1.5A  
 USB-C + USB-A: 5V/3A  
 Total Output: 20W (Max)  
 Size: 40.8\*31\*32mm  
 Weight:

**PD-117PT**  
**PD3.0 20W**  
 20W PD GAN charger

1A1C



Input: 100-240V 50/60Hz 0.5A MAX  
 USB-C Output: 5V/3A, 9V/2.22A, 12V=1.67A  
 Total Output: 20W (Max)  
 Size: 29.6\*30.1\*30.1mm  
 Weight: 40g

**PD-075**

**PD3.0 20W**  
 20W PD GAN charger

1C



PD 20W PD charger  
 Input: 100-240 V-50/60 Hz 0.6A MAX  
 USB-C Output: 5V/3A, 9V/2.22A, 12V/1.67A (20W)

**PD-605**

**PD3.0 20W**  
 20W PD GAN charger

1C





## PDT-001

**380W 6C2A**  
380W PD3.1 GaN Charger

380W PD3.1 GaN Charger  
Input: 100-240Vac 50/60Hz 4.5A MAX  
USB-C1 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A;  
USB-C2 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A;  
USB-C3 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C4 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C5 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C6 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-A1 Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A;  
USB-A2 Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A;

PD 3.1



## PDT-006

**300W 5C1A**  
300W PD GaN Charger

Input: 100-240Vac 50/60Hz 4.2A MAX  
USB-C1 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A;  
USB-C2 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C3 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C4 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C5 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-A1 Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 10V/2.25A, 12V/2.5A, 20V/1.5A  
Total Output Power: 300W(Max);



## PD-589

**300W 4C1A**  
300W 4C1A GaN PD Charger

Input: 100-240Vac, 50/60Hz, 3.8A Max  
USB-C1/C2 Output: 3.3-21V/5A or 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A (140W)  
USB-C3 Output: 3.3-21V/5A or 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W)  
USB-C4 Output: 3.3-11V/5A or 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W)  
USB-A Output: 4.5V/5A, 5V/4.5A, 5V/3A, 9V/3A, 12V/3A, 20V/3A (60W)  
Total output: 300W Max  
Color: Black/White  
AC Wire: UK/US/EU/KR  
Size: 108\*78\*32mm  
Certificate: UL CB CE FCC KC



**330W**  
330W GaN desktop charger

## PD-130

Input: 100-240Vac 50/60Hz 5A MAX  
XT60 Output: 20V/15A;  
USB-C Output: 3.3V-21V/5A;  
5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-A Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A;

XT60 Output



## PDT-005

**240W 4C1A**  
240W PD 3.1 charger

Input: 100-240Vac 50/60Hz 3A MAX  
USB-C1 Output: 5V-20V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A;  
USB-C2 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C3 Output: 3.3V-21V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A;  
USB-C4 Output: 3.3V-11V/5A; 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A;  
USB-A Output: 5V/3A, 9V/2A, SSCP: 10V/2.25A, 12V/1.5A;  
USB-C1+USB-C2 or USB-C1+USB-C3; Output: 140W+100W;  
2port: USB-C4+USB-A Output: 5V/1.5A+1.5A;  
3port: USB-C1+USB-C2+USB-C3 or USB-C4 Output: 100W+65W+65W  
3port: USB-C1+USB-C2+USB-A Output: 100W+65W+18W  
4port: USB-C1+USB-C2+USB-C3+USB-C4 Output: 100W+65W+45W+30W  
5port: USB-C1+USB-C2+USB-C3+(USB-C4+USB-A) Output:  
100W+65W+45W+(5V/3A 15W)  
Total Output Power: 240W(Max);

PD 3.1



## PD-085PT

**200W 3C2A**  
200W PD desktop charger

Input:200V-240V ~50/60Hz 3A  
C1/C2/C3 (100W) :3.3V-21V5A,5V3A, 9V3A,12V3A, 15V3A, 20V5A ,  
PPS:3.3-21V 5A  
A1/A2 (22.5W) scp & QC: 4.5V5A,5V4.5A,5V/3A,9V3A, 12V1.5A(22.5W)  
C1+C2 or C1+C3 or C2+C3=100W+100W  
C1+A1/A2 or C2+A1/A2 or C3+A1=100W+22.5W  
C3+A2=5V/2.4A+5V/2.4A  
A1+A2=5V/3A C1+C2+C3=100W+65W+65W  
(C1+C2)/(C1+C3)/(C2+C3)+A/A2=100W+65W+22.5W  
C1+C2+C3+A1 or A2=100W+65W+20W+22.5W  
C1+C2+C3+A1+A2=100W+65W+20W+15W(5V/3A)  
Total Output: 200W



## PDT-007

**200W 5C1A**  
170W 7C1A Smart Charger

Input100-240Vac 50/60HZ 3A MAX  
USB-C1/C2/C3/C4/C5 Output:3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-A Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 12V/3A, 20V/3A;  
USB-C1+USB-C2/C3 Output:65W+35W;  
USB-C1+ USB- C2 Output:100W+100W;  
USB-C1+ USB- A Output:100W+60W;  
USB-C5+USB-A Output: 5V/4.8A (24W);  
USB-C1+USB-C2+USB-C3 Output:100W+65W+35W;  
USB-C1+USB-C2+USB-C3+USB-C4 Output:100W+45W+35W+20W;  
USB-C1+USB-C2+USB-C3+USB-C4+USB-C5 Output: 65W+45W+35W+35W+20W;  
USB-C1+USB-C2+USB-C3+USB-C4+USB-C5+USB-A Output: 65W+45W+35W+35W+12W+12W;  
Total Output Power: 200W(MAX)



## PDT-003

**170W 7C1A**  
170W 7C1A Smart Charger

Input100-240Vac 50/60HZ 2A MAX  
USB-C1 Output:3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,  
USB-C2 Output: 3.3V-11V/3A; 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A  
USB-C3 Output: 3.3V-11V/3A; 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A  
USB-C4 Output: 5V/3A,9V/2.22A,12V/1.67A  
USB-C5 Output: 5V/3A,9V/2.22A,12V/1.67A  
USB-C6 Output: 5V/3A,9V/2.22A,12V/1.67A  
USB-C7 Output: 5V/3A,9V/2.22A,12V/1.67A  
USB-A Output: 5V/3A,9V/2A,10V/2.25A,12V/1.5A  
USB-C2+USB-C3 Output: 15W (5V3A);  
USB-C4+USB-C5 Output: 15W (5V3A);  
USB-C6+USB-C7+USB-A Output: 15W (5V3A);  
USB-C1+USB-C2/USB-C3+USB-C4/USB-C5+USB-C6/USB-C7/USB-A:100W+30W+20W+20W  
Total Output Power: 170W



## PDT-002/B

**100W 3C1A**  
100W 3C1A smart charger

Input100-240Vac 50/60HZ 1.5A MAX  
USB-C1 Output: 3.3-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C2 Output: 3.3-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C3 Output: 3.3-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A Output: 4.5V/5A, 5V/4.5A, 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A ;  
USB-C1+USB-C2 /C3 Output: 65W+35W;  
USB-C1/C2+USB-A Output: 65W+30W;  
USB-C2+USB-C3 Output: 65W+35W;  
USB-C3+USB-A Output: 5V/3A (15W) ;  
USB-C1+USB-C2+USB-C3 Output: 45W+35W+20W;  
USB-C1+USB-C2+USB-A Output: 45W+35W+18W;  
USB-C1/C2+USB-C3+USB-A Output: 65W+15W;  
USB-C1+USB-C2+ USB-C3+USB-A Output: 45W+35W+15W;  
Total Output Power: 100WMAX;



## PDT-004

**140W 3C1A**  
140W 3C1A smart charger

Input100-240Vac 50/60HZ 1.8MAX  
USB-C1 Output:3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A;  
USB-C2 Output: 3.3V-21V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A;  
USB-C3 Output: 3.3V-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A Output: 4.5V/5A; 5V/4.5A, 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A;  
USB-C1+USB-C2/C3 Output:100W+35W;  
USB-C1/C2+USB-A Output: 100W+30W;  
USB-C2+USB-C3 Output:100W+35W;  
USB-C3+USB-A Output: 15W (5V3A);  
USB-C1+USB-C2+USB-C3 Output:65W+45W+30W;  
USB-C1+USB-C2+USBA Output:65W+45W+30W;  
USB-C1/C2+USB-C3+USBA Output:100W+15W(5V/3A);  
Total Output Power: USB-C1 65W+ USB-C2 45W+USB-C3+USB-A 15W(5V/3A);





## PSM-001

**65W+**  
**10000mAh**

Input:100-240Vac 50/60HZ 1.5A MAX  
 USB-C1 Output:5V-11V/5A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A; (Max:65W)  
 USB-C2 Output: 5V/3A,9V/2.22A(Max:20W)  
 USB-A Output:5V/3A,9V/2A,10V/2.25A,12V/1.5A(Max:22.5W)  
 USB-C1+USB-C2 Output: 45W(5V-11V/4A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A)+20W(5V/3A,9V/2.22A)  
 USB-C1+USB-A Output: 45W(5V-11V/4A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A)+18W(5V/3A,9V/2A)  
 USB-C2+USB-A Output: 5V3A(15W);  
 USB-C1+USB-C2+USB-A Output: 45W(5V-11V/4A; 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A)+5V3A(15W);  
 Total Output Power: 65W  
 Power bank mode:  
 USB-C1 Input:5V/3A,9V/2.22A(Max:20W)  
 USB-C1 Output:5V-11V/3A; 5V/3A,9V/3A,12V/2.92A,15V/2.33A,20V/1.75A; (Max:35W)  
 USB-C2 Output: 5V/3A,9V/2.22A(Max:20W)  
 USB-A Output:5V/3A,9V/2A,10V/2.25A,12V/1.5A(Max:22.5W)  
 USB-C1+USB-C2 Output: 18W(5V/3A,9V/2A)+18W(5V/3A,9V/2A)  
 USB-C1+USB-A Output: 18W(5V/3A,9V/2A)+18W(5V/3A,9V/2A)  
 USB-C2+USB-A Output: 5V3A(15W);  
 USB-C1+USB-C2+USB-A Output: 18W(5V/3A,9V/2A)+5V3A(15W);  
 Total Output Power: 36W  
 batteries: 10000mAh



## PSM-002

**33W**  
**5000mAh**

Input:100-240Vac 50/60HZ 1A MAX  
 USB-C1 Output:5V-11V/3A; 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A; (Max:30W)  
 USB-C2 Output:5V-11V/3A; 5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A; (Max:30W)  
 USB-C1+USB-C2 Output: 5V3A(15W);  
 Total Output Power: 30W  
 Power bank mode:  
 USB-C1 Input:5V/3A,9V/2.22A(Max:20W)  
 USB-C1 Output: 5V/3A,9V/2.22A(Max:20W)  
 USB-C2 Output: 5V/3A,9V/2.22A(Max:20W)  
 USB-C1+USB-C2 Output: 5V3A(15W);  
 Total Output Power: 20W  
 batteries: 5000mAh



## PSM-301

**35W+**  
**10000mAh**

Input:100-240V~50/60Hz 1AMax  
 Charger Mode:  
 USB-C1 Output:5V-11V-3A or 5V-3A or 9V-3A or 12V-2.92A or 15V-2.33A or 20V-1.75A(Max:35W)  
 USB-C2 Output:5V-11V-3A or 5V-3A or 9V-3A or 12V-2.92A or 15V-2.33A or 20V-1.75A(Max:35W)  
 USB-AOutput:5V-3A or 9V-2A or 10V-2.25A or 12V-1.5A(Max:22.5W)  
 TotalOutput Power:35W  
 Battery Mode  
 USB-C1 Input:5V-3A or 9V-2.22A or 12V=1.67A(Max:20W)  
 USB-C1 Output:5V-11V-3A or 5V-3A or 9V-3A or 12V-2.92A or 15Vm2.33A or 20V-1.75A(Max:35W)  
 )USB-C2 Output:5V-11V-3A or 5V-3A or 9V-3A or 12V-2.92A or 15V-2.33A or 20V-1.75A(Max:35W)  
 USB-AOutput:5V-3A or 9V-2A or 10V-2.25A or 12V-1.5A(Max:22.5W)  
 Total Output Power:35W  
 Battery capacity:10000mAh  
 Rated capacity:6000mAh



## PD-109PTEU/KR

PD GAN charger socket



USB Input: 100-240Vac 50/60Hz 1.5A Max  
USB-C1/C2/C3/C4 Output: PPS:3.3V-11V/4.05A; PD3.0: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A1/A2/A3/A4 Output: QC3.0: 5V/3A,9V/2A,12V/1.5A;(3.3-6.5V/3A;6.5V-9V/2A;9V-12V/1.5A);  
USB-(C1+A1) / (C2+A2) / (C3+A3) / (C4+A4) Output: 5V/3A;  
USB-C1+C2/C3/C4:Output:20W+20W(5V/3A/9V2.22A/12V/1.67A)  
USB-A1/A2/A3/A4:Output:5V/3A;  
USB Total Output: 65W(Max)  
5 outlet AC Socket:4000W

**PD3.0 16A**  
**4000W+65W**

## PD-109PTUK

PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.5A  
USB-C1/C2/C3/C4 Output: PPS:3.3V-11V/4.05A; PD3.0: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A1/A2/A3/A4 Output: QC3.0: 5V/3A,9V/2A,12V/1.5A;(3.3-6.5V/3A;6.5V-9V/2A;9V-12V/1.5A);  
USB-C1+A1/C2+A2/C3+A3/C4+A4 Output: 5V/3A;  
USB-C1+C2/C3/C4:Output:20W+20W(5V/3A/9V2.22A/12V/1.67A);  
USB-A1/A2/A3/A4:Output:5V/3A;  
USB Total Output: 65W(Max)  
5 outlet AC Socket:3250W

**PD3.0 13A**  
**3250W+65W**

## PD-110 BEU/PTKR/BKR

PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.8A  
USB-C1 (100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A,  
USB-C2 (65W) :3.3V-11V5A,5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A  
USB-C3 (35W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.92A,15V/2.33A,20V/1.75A  
USB-C4 (30W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.5A,15V/2A,20V/1.5  
A1/A2 (30W) scp &QC: 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
A3/A4 (18W) : 5V/3A,9V/2A,12V/1.5A  
5 outlet AC Socket:4000W

**PD3.0 16A**  
**4000W+100W**

## PD-110PTUK/BUK

PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.8A  
USB-C1 (100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A,  
USB-C2 (65W) :3.3V-11V5A,5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A  
USB-C3 (35W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.92A,15V/2.33A,20V/1.75A  
USB-C4 (30W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.5A,15V/2A,20V/1.5  
A1/A2 (30W) scp &QC: 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
A3/A4 (18W) : 5V/3A,9V/2A,12V/1.5A  
5 outlet AC Socket:3250W

**PD3.0 13A**  
**3250W+100W**

## PD-109PTUS

PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.5A  
USB-C1/C2/C3/C4 Output: PPS:3.3V-11V/4.05A; PD3.0: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A1/A2/A3/A4 Output: QC3.0: 5V/3A,9V/2A,12V/1.5A;(3.3-6.5V/3A;6.5V-9V/2A;9V-12V/1.5A);  
USB-C1+A1/C2+A2/C3+A3/C4+A4 Output: 5V/3A;  
USB-C1+C2/C3/C4:Output:20W+20W(5V/3A/9V2.22A/12V/1.67A);  
USB-A1/A2/A3/A4:Output:5V/3A;  
USB Total Output: 65W(Max)  
5 outlet AC Socket:1875W

**PD3.0 16A**  
**1875W+65W**

Input: 100V-240V ~50/60Hz 1.5A  
USB-C1/C2/C3/C4 Output: PPS:3.3V-11V/4.05A; PD3.0: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A1/A2/A3/A4 Output: QC3.0: 5V/3A,9V/2A,12V/1.5A;(3.3-6.5V/3A;6.5V-9V/2A;9V-12V/1.5A);  
USB-C1+A1/C2+A2/C3+A3/C4+A4 Output: 5V/3A;  
USB-C1+C2/C3/C4:Output:20W+20W(5V/3A/9V2.22A/12V/1.67A);  
USB-A1/A2/A3/A4:Output:5V/3A;  
USB Total Output: 65W(Max)  
5 outlet AC Socket:1625W

**PD3.0 13A**  
**1625W+65W**

Input: 100V-240V ~50/60Hz 1.5A  
USB-C1/C2/C3/C4 Output: PPS:3.3V-11V/4.05A; PD3.0: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A;  
USB-A1/A2/A3/A4 Output: QC3.0: 5V/3A,9V/2A,12V/1.5A;(3.3-6.5V/3A;6.5V-9V/2A;9V-12V/1.5A);  
USB-C1+A1/C2+A2/C3+A3/C4+A4 Output: 5V/3A;  
USB-C1+C2/C3/C4:Output:20W+20W(5V/3A/9V2.22A/12V/1.67A);  
USB-A1/A2/A3/A4:Output:5V/3A;  
USB Total Output: 65W(Max)  
5 outlet AC Socket:1250W

**PD3.0 10A**  
**1250W+65W**

## 65W AC Socket

109 multi-specification series



## 100W AC Socket

110 multi-specification series



## PD-110PTUS

PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.8A  
USB-C1 (100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A,  
USB-C2 (65W) :3.3V-11V5A,5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A  
USB-C3 (35W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.92A,15V/2.33A,20V/1.75A  
USB-C4 (30W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.5A,15V/2A,20V/1.5  
A1/A2 (30W) scp &QC: 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
A3/A4 (18W) : 5V/3A,9V/2A,12V/1.5A  
5 outlet AC Socket:1875W

**PD3.0 15A**  
**1875W+100W**

Input: 100V-240V ~50/60Hz 1.8A  
USB-C1 (100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A,  
USB-C2 (65W) :3.3V-11V5A,5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A  
USB-C3 (35W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.92A,15V/2.33A,20V/1.75A  
USB-C4 (30W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.5A,15V/2A,20V/1.5  
A1/A2 (30W) scp &QC: 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
A3/A4 (18W) : 5V/3A,9V/2A,12V/1.5A  
5 outlet AC Socket:1625W

**PD3.0 13A**  
**1625W+100W**

Input: 100V-240V ~50/60Hz 1.8A  
USB-C1 (100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A,  
USB-C2 (65W) :3.3V-11V5A,5V3A, 9V3A, 12V3A, 15V3A, 20V3.25A  
USB-C3 (35W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.92A,15V/2.33A,20V/1.75A  
USB-C4 (30W) : PD3.0 3.3-11V3A,5V3A, 9V3A, 12V/2.5A,15V/2A,20V/1.5  
A1/A2 (30W) scp &QC: 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
A3/A4 (18W) : 5V/3A,9V/2A,12V/1.5A  
5 outlet AC Socket:1250W

**PD3.0 10A**  
**1250W+100W**



Can be separated

**PD-111/2BEU**  
PD GAN charger socket

Input: 100V-240V ~50/60Hz 1.8A  
 USB-C2/USB-C3/USB-C4(100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A  
 USB-A1/USB-A2/USB-A3/USB-A4 (30W) :  
 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
 9 outlet AC Socket: 4000W

**PD3.0 16A**  
**4000W+100W/65W**



**PD-111/2PTUS**  
PD GAN charger socket



Input: 100V-240V ~50/60Hz 1.8A  
 USB-C2/USB-C3/USB-C4(100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A  
 USB-A1/USB-A2/USB-A3/USB-A4 (30W) :  
 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
 9 outlet AC Socket: 1875W

**PD3.0 15A**  
**1875W+100W/65W**

Input: 100V-240V ~50/60Hz 1.8A  
 USB-C2/USB-C3/USB-C4(100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A  
 USB-A1/USB-A2/USB-A3/USB-A4 (30W) :  
 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
 9 outlet AC Socket: 1625W

**PD3.0 13A**  
**1625W+100W/65W**

Input: 100V-240V ~50/60Hz 1.8A  
 USB-C2/USB-C3/USB-C4(100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A  
 USB-A1/USB-A2/USB-A3/USB-A4 (30W) :  
 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
 9 outlet AC Socket: 1250W

**PD3.0 10A**  
**1250W+100W/65W**



Can be separated



Can be separated

**PD-111/2PTUK/BUK**  
PD GAN charger socket

Input: 100V-240V ~50/60Hz 1.8A  
 USB-C2/USB-C3/USB-C4(100W) :3.3V-21V5A,5V3A,9V3A,12V3A,15V3A,20V5A  
 USB-A1/USB-A2/USB-A3/USB-A4 (30W) :  
 4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A  
 9 outlet AC Socket: 3250W

**PD3.0 13A**  
**3250W+100W/65W**



**One-stop output is all done.**

**109/110 derivative double-layer series**

# Vina Wireless Charger and Power Bank Charger

Vina International Holdings LTD



## WT-K491

Qi2 Refrigeration three in one magnetic wireless charging

Input: 5V/3A 9V/3A 12V/2.4A  
Output: Smart Phone:5W/7.5W/10W/15W  
Watch:5W  
earphone: 5W  
Size: 100mm\*100mm\*152mm  
Material: aluminum alloy+ABS+PC

Qi2



## WT-K490

Qi2 Refrigeration three in one magnetic wireless charging

Input: 5V/2.4A 9V/3A  
Output: Smart Phone:5W/7.5W/10W/15W  
Watch:2.5W  
earphone: 5W  
Size: 82\*64\*64mm  
N.W: 326g  
Material:ABS+PC+silicone rubber

Qi2



## WT-K489

Qi2 Refrigeration magnetic suction three in one wireless charging

Input: 9V-3A  
Output: Smart Phone:5W/7.5W/10W/15W  
Watch:2.5W  
earphone: 5W  
Size: 80\*80\*118mm  
N.W: 230g  
Material:ABS+zinc alloy+silicone

Qi2



## WT-K488

Qi2 Three in one magnetic wireless charging +Watch charging compatible with Samsung and Apple

Input: 9V-3A  
Output: Smart Phone:5W/7.5W/10W/15W  
Watch:2.5W  
earphone: 5W  
Size: 108\*62\*24mm  
N.W: 69g  
Material:ABS+PC+silicone rubber

Qi2



## WT-K484

Qi2 2-in-1 magnetic wireless charging +Mobile phone holder

Input:9V/3A \_x005f  
Output: 15W/10W/7.5W/5W  
watch:2.5W  
Size:61mm\*19.5mm  
N.W: 69g  
Material:ABS+PC +silicone+zinc alloy

Qi2



## WT-K483

Qi2 3 in 1 Magnetic zinc alloy Folding design Wireless charger

Input:9V/3A, 12V/2.5A (QC or PD)  
Output: 15W/10W/7.5W/5W  
Smart watch:2.5W  
Earphone: 5W  
Color: Gray color  
Size:68mmx68mmx25mm  
N.W: 230g  
Material:aluminum alloy+silica ge

Qi2



## WT-K482

Qi2 Magnetic wireless charging

Input:9V2.22A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Size:57.8mm\*7.5mm  
Material:Aluminum alloy+glass+Weaving thread

Qi2



## WT-K481

Qi2 Multi functional three in one magnetic wireless charging

Input:9V3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX) Output :Earphone 5W(MAX)  
Bluetooth speaker:5W 4Ω  
Battery:1000mAh  
Size:66\*66\*108.5mm  
weight: 370g  
Material:ABS+PC+Metal  
1.Built in clock alarm clock  
2. Bluetooth Speaker  
3.Pixel animation  
4.Sound rhythm

Qi2



## WT-K480

Qi2 2-in-1 magnetic wireless charging

Input:9V-3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Size:75\*58.5\*20mm  
weight: 108g  
Material:ABS+silicone+aluminum alloy

Qi2



## WT-K479

Qi2 Three in one magnetic wireless charging

Input:9V-3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:98\*58.5\*34mm  
weight: 149g  
Material:ABS+silicone+aluminum alloy

Qi2

## WT-K478

Qi2 Three in one magnetic wireless charging

Input:9V-3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:84\*\*60.5\*28.7mm  
weight: 129g  
Material:ABS+silicone+aluminum alloy

Qi2



## WT-K477

Qi2 Three in one magnetic wireless charging

Input:9V-3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:100\*100\*159 mm  
Material:ABS+PC

Qi2



## WT-K476

Qi2 Three in one magnetic suction wireless charging 15W+2.5W+5W

Input:5V/3A, 9V/3A,12V/3A QC3.0 ,PD  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:70.3\*70.3\*122mm  
weight: 430g  
Material:ABS

Qi2



## WT-K466

Qi2 Three in one magnetic suction wireless charging 15W+2.5W+5W

Input:5V/3A, 9V/3A,12V/3A QC3.0 ,PD  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size: 66\*66\*105mm  
weight: 292g  
Material:ABS

Qi2

## WT-K474

Magnetic three in one wireless charging

Input: 5V/3A 9V/3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:105mm\*66mm\*24mm  
weight: 190g  
Material:ABS+PC+Aluminum alloy



## WT-K473

Qi2 Magnetic three in one wireless charging

Input: 5V/3A 9V/3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:96mm\*65mm\*30mm  
weight: 175g  
Material:ABS+PC

Qi2



## WT-K465

Qi2 Three in one magnetic suction wireless charging 15W+2.5W+5W

Input:5V/3A, 9V/3A,12V/3A QC3.0 ,PD  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:76\*76\*109mm  
weight: 346g  
Material:aluminum+ABS

Qi2



## WT-K464

Qi2 Three in one magnetic suction wireless charging 15W+5W+5W

Input: 9V/3A,12V/3A QC3.0 ,PD  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 5W(MAX)  
Output :Earphone 5W(MAX)  
Size:89.93\*73.93\*36.5mm  
Material:ABS+PC+Zinc alloy  
Watch 5W fast charging

Qi2

## WT-K472

Qi2 Three in one magnetic wireless charging

Input: 9V/3A,12V/3A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 5W(MAX)  
Size:92mm\*64mm\*34mm  
Material:ABS+PC

Qi2



## WT-K470

360° rotating three in one folding wireless charger

Input: 9V-3A 12V-2A  
output: Phone 5W, 7.5W, 10W, 15Wmax  
Output :Watch 2.5W(MAX)  
Output :Earphone 3W(MAX)  
Wireless charging distance : ≤8mm  
Size: 98.3\*24.7\*95.8mm  
weight: 263 g  
Material: Zinc alloy+silicone



## WT-K463

Magnetic folding three in one wireless charging

Input : 5V/3A 9V/3A  
Mobile output: 15W (MAX)  
Earphone output: 5W (MAX)  
Watch output: 5W (MAX)  
Net weight: 260g  
Product size: 75mm \* 75mm \* 36.5mm  
Color: Black  
Material: ABS+PC+zinc alloy

Qi2



## WT-K460

Magnetic suction three in one wireless charging+small night light +360° rotation

input: 9V/2A; 12V/2A  
output: mobile phone 15W MAX  
Airpods: 5W MAX  
iwatch: 2.5W MAX  
Product size: 84.5\*\*80.8\*32mm  
weight: 155g  
material quality : ABS+silicone  
colour : Black 、 white (Customizable colors)  
Touch controlled lighting



## WT-K461

360° rotating three in one magnetic suction wireless charging

input: 9V/2A; 12V/2A  
output: mobile phone 15W MAX  
Airpods: 5W MAX  
iwatch: 2.5W MAX  
Product size: 122\*97\*113mm  
weight: 165g  
material quality : ABS+silicone  
colour : Black 、 white (Customizable colors)



## WT-K451A

Three in one foldable magnetic suction wireless charging

input: 9V/2A 12V/2A  
Watch output: 2.5W  
headphone output: 5W  
Mobile output: 7.5W; 10W; 15W  
Conversion: up to 80%  
Charging distance: ≤6mm  
Product size: 88\*80\*25mm  
Product weight: 173g  
Material: kirsite+silica gel+ABS



## PB-43

Large capacity portable power bank with cable

Capacity: 20000mAh  
Type-C /Type-C cable Input:5V-3A 9V-3A 12V-3A 15V-3A 20V-2.25A (PD45W MAX)  
Type-C /Type-C cable Output: 5V-3A 9V-3A 12V-3A 15V-3A 20V-2.25A (PD45W MAX)  
USB-A Output: 5V-3A 9V-2A 10V-2.25A (SCP)12V-1.5A (22.5W MAX)  
Lightning cable Output: 5V-3A 9V-3A 12V-2.25A (27W MAX)  
Size: 88.2mm\*66.9mm\*26.8mm  
Material: ABS+PC

## PB-43

Large capacity portable power bank with cable

Capacity: 10000mAh  
Type-C /Type-C cable Input:5V-3A 9V-3A 12V-3A 15V-3A 20V-2.25A (PD45W MAX)  
Type-C /Type-C cable Output: 5V-3A 9V-3A 12V-3A 15V-3A 20V-2.25A (PD45W MAX)  
USB-A Output: 5V-3A 9V-2A 10V-2.25A (SCP)12V-1.5A (22.5W MAX)  
Lightning cable Output: 5V-3A 9V-3A 12V-2.25A (27W MAX)  
Size: 88.2mm\*66.9mm\*26.8mm  
Material: ABS+PC



## WT-K451

Three in one foldable magnetic suction wireless charging

input: 9V/2A 12V/2A  
Watch output: 2.5W  
headphone output: 5W  
Mobile output: 7.5W; 10W; 15W  
Conversion: up to 80%  
Charging distance: ≤6mm  
Product size: 88\*80\*25mm  
Product weight: 173g  
Material: kirsite+silica gel+ABS The base can rotate 360°



## WT-A433

Three in one foldable wireless

Input power: 5V/2A 9V/2A  
Mobile output:15W MAX  
headphone output:5W MAX  
Watch output:3W MAX  
Material: ABS+PC+aluminum alloy wire drawing process  
Product size: 137mm\*68mm\*32mm

## PB-39

Large capacity and high-power mobile power supply with cable

Capacity: 20000mAh  
Type-C /Type-C cable Input: 5V-3A 9V-3A 12V-3A 15V-3A 20V-3.25A (PD65W MAX)  
Type-C /Type-C cable Output: 5V-3A 9V-3A 12V-3A 15V-3A 20V-3.25A (PD65W MAX)  
USB-A Output: 5V-3A 9V-2A 10V-2.25A (SCP) 12V-1.5A (22.5W MAX)  
Size: 138.9mm\*68.8mm\*34.8mm  
Material: ABS+PC

## PB-38

Large capacity and high-power mobile power supply with cable

Capacity: 20000mAh  
Type-C /Type-C cable Input: 5V-3A 9V-3A/ 12V-2.5A/15V-2A/20V-1.5A, (30W)  
Type-C /Type-C cable Output: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A, (30W)  
USB-A Output: 5V-3A 9V-2A 10V-2.25A (SCP) 12V-1.5A (22.5W MAX)  
Size: 138.9mm\*68.8mm\*34.8mm  
Material: ABS+PC



## WT-K458

Magnetic suction three in one wireless charging

input: 5V/3A, 9V/3A, 12V/3A  
output: 5W, 7.5W, 10W, 15Wmax  
headset:3W  
Wrist watch:2.5W  
Product size: 68.5mm\*60mm\*66mm weight:245g  
material quality: Tempered glass lenses+zinc alloy electroplating+(ABS+PC)



## PB-43

Large capacity portable power bank with cable

Capacity: 10000mAh  
Type-C Input: 5V-3A 9V-2A 12V-1.5A (18W)  
Type-C /Type-C cable Output: 5V-3A 9V-2.22A 10V-2.25A (SCP) 12V-1.67A (22.5W)  
USB-A Output: 5V-3A 9V-2A 10V-2.25A (SCP) 12V-1.5A (22.5W)  
Size: 114mm\*64mm\*23.6mm  
Material: ABS+PC



## PB-37

### Mini Cable Mobile Power Bank

Capacity: 10000mAh  
 Type-C /Type-C cable Input: 5V-3A 9V-3A/  
 12V-2.5A/15V-2A/20V-1.5A, (30W)  
 Type-C /Type-C cable Output:  
 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A, (30W)  
 Size: 124.6mm\*54.5mm\*25mm  
 Material: ABS+PC

## PB-36

### Mini Cable Mobile Power Bank

Capacity: 10000mAh  
 Type-C /Type-C cable Input: 5V/3A 9V/2A 12V/1.5A  
 (18W MAX)  
 Type-C /Type-C cable Output: 5V/3A 9V/2.22A  
 10V/2.25A(SCP) 12V/1.5A (PD20W/22.5W MAX)  
 Size: 124.6mm\*54.5mm\*25mm  
 Material: ABS+PC

## PB-35

### 45W Dual Output Input Portable Power Bank with Extension Module

Capacity: 10000mAh  
 TYPE C1/C2(cable)In-  
 put:5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A)  
 Type-C1/C2(cable) Output:  
 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A  
 Product size: 127\*58\*22mm  
 Material: PC



## PB-32

### Mini portable power bank with cable

Capacity: 5000mAh  
 Watch wireless charging: 2.5W  
 Type-C Input:5V/3A 9V/2A 12V/1.5A(18W)  
 Type-C Output:5V/3A 9V/2.22A 12V/1.67A(20W )  
 Type-C cable Input: 5V/3A 9V/2A 12V/1.5A(18W)  
 Type-C cable Output:5V/3A 9V/2.22A 12V/1.67A(20W )  
 Lightning cable Output: 5V/2.4A  
 Product size: 79mm\*40.5mm\*28mm  
 Material: ABS+PC



## PB-31

### Comes with a built-in portable power bank

Capacity: 10000mAh  
 USB-A Output: 5V/3A 9V/2A 10V/2.25A(SCP)  
 12V/1.5A(22.5W)  
 TYPE-C Output: 5V/3A 9V/2.22A 12V/1.67A(20W) TYPE-C  
 cable Output: 5V/3A 9V/2A 10V/2.25A(SCP)  
 12V/1.5A(22.5W)  
 TYPE-C Input: 5V/2A 9V/2A 12V/1.5A(18W)  
 TYPE-C cable Input: 5V/2A 9V/2A 12V/1.5A(18W)  
 Product size: 79mm\*40.5mm\*28mm  
 Material: ABS+PC

## PB-29

### High power portable power bank

Capacity: 10000mAh/3.85V/38.5Wh  
 TYPE-C Output:  
 5V-3A/9V-3A/10V-2.25A/12V-2.5A/15V-2.33A (35W)  
 TYPE-C cable Output:  
 5V-3A/9V-3A/10V-2.25A/12V-2.5A/15V-2.33A (35W)  
 TYPE-C Input: 5V-3A/9V-2.22A/12V-1.67A  
 TYPE-C cable Input: 5V-3A/9V-2.22A/12V-1.67A  
 Product size: 73\*63.5\*26.4mm  
 weight: 175g  
 Material: ABS+PC

## PB-27

### Mini portable power bank

Capacity: 10000mAh/3.85V/38.5Wh  
 TYPE-C Output: 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
 TYPE-C cable Output: 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
 TYPE-C Input: 5V-3A/9V-2A/12V-1.5A  
 TYPE-C cable Input: 5V-3A/9V-2A/12V-1.5A  
 Lightning cable Input: 5V-2.4A  
 Product size: 73\*63.5\*26.4mm  
 weight: 175g  
 Material: ABS+PC



## PB-30

### High power portable power bank

Capacity: 20000mAh/3.85V/77Wh  
 USB-A Output: 5V-3A/9V-2A/10V-2.25A/12V-1.5A  
 TYPE-C Output: 5V-3A/9V-3A/12V-3A/15V-3A/20V-2.25A(45W)  
 TYPE-C cable Output:  
 5V-3A/9V-3A/12V-3A/15V-3A/20V-2.25A(45W)  
 TYPE-C Input: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A  
 TYPE-C cable Input: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A  
 Product size: 103\*71\*29mm  
 weight: 335g  
 Material: ABS+PC



## PB-28

### Large capacity portable power bank

Capacity: 20000mAh/3.85V/77Wh  
 USB-A Output: 5V-3A/9V-2A/10V-2.25A/12V-1.5A  
 TYPE-C Output: 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
 TYPE-C cable Output:  
 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
 TYPE-C Input: 5V-3A/9V-2A/12V-1.5A  
 TYPE-C cable Input: 5V-3A/9V-2A/12V-1.5A  
 Lightning cable Input: 5V-2.4A  
 Product size: 102\*71\*29mm  
 weight: 335g Material: ABS+PC



## PB-26

### 65W high-power mobile power supply Battery:Li-polymer\*4PCS

Capacity: 20000mAh/3.7V/74Wh  
 USB-C Input:5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W Max)  
 USB-C cable Input: 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A(45W Max)  
 USB-C Output:5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A (65W Max)  
 PPS: 3.3-11V/ 5A, 3.3-20V /3.25A (65W Max)  
 USB-C cable Output: 5V/3A 9V/3A 12V/3A 15V/3A 20V/3.25A (PD 65W Max)  
 PPS:3.3-11V/ 5A, 3.3-20V /3.25A (PD 65W Max)  
 USB-A Output: 5V-3A/9V-2A/12V-1.5A /4.5V-5A /5V-4.5A /10V-2.25A (22.5W Max)  
 Total Output:5V/3A (15W Max)  
 Protocols: PPS, PD3.0, PD2.0, QC3.0, QC2.0, AFC, SCP  
 Size: 108\*68\*32.5mm  
 Material: Fireproof ABS+PC+rubber oil finished



## PB-25

Equipped with dual wire high capacity powerbank

Capacity: 10000mAh (Polymer cell 10000mAh \*1)  
TYPE-C cable output: 5V3A/9V2.22A/12V1.67A(20W)  
TYPE-C cable input: 5V-2.4A/9V-2A/12V-1.5A  
Lightning cable output: 5V-2.4A/9V-2.22A/12V-1.67A(20W)  
USB-A output: 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A(22.5W)  
TYPE-C input: 5V-2A/9V-2A/12V-1.5A (18W)  
Product size : 113\*72\*22mm  
Material quality : Fireproof ABS+PC  
LED digital display



## PB-24

Equipped with dual wire high capacity powerbank

Capacity: 20000mAh (Polymer cell 10000mAh \*2)  
TYPE-C cable output: 5V3A/9V2.22A/12V1.67A(20W)  
TYPE-C cable input: 5V-2.4A/9V-2A/12V-1.5A  
Lightning cable output: 5V-2.4A/9V-2.22A/12V-1.67A(20W)  
USB-A output: 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A(22.5W)  
TYPE-C input: 5V-2A/9V-2A/12V-1.5A(18W)  
Product size : 129\*73\*30mm  
Material quality : Fireproof ABS+PC  
LED digital display



## PDB-580

Mini magnetic three in one portable power bank

Battery capacity: 10000mAh  
Type-C /Type-C cable Input:5V3A 9V2A 12V1.5A (18W MAX)  
Type-C /Type-C cable Output: 5V/3A 9V/2.22A 10V/2.25A (SCP)12V/1.5A (PD20W/22.5W MAX)  
USB-A Output: 5V2A (10W MAX)  
Lightning cable Output: 5V3A 9V2.22A 12V1.67A (20W MAX)  
Size: 77mm\*70.1mm\*27.2mm  
Material: ABS+PC



## PDB-579

Five in one magnetic suction mobile power supply

Size: 107\*69.8\*19.5mm Weight: 220.8G  
Battery capacity: 10000mAh/3.85V/38.5Wh  
Material: ABS+zinc alloy  
Wireless : 15W10W7.5W15W (iWatch) : 2.5W  
USB-C Cable Out:5V/2.4A 9V/2.22A 12V/1.67A (20W)  
USB-C Cable Input: 5V-3A 9V-2A 12V-1.5A  
Lighting Cable OUT:5V/2.4A  
Type-C Input: 5V/3A 9V/2A 12V/1.5A (18W)  
Type-C OUT:5V/3A 9V/2.22A 12V/1.67A (20W)



## PB-23

High power portable power bank

Capacity: 10000mAh (Polymer cell 5000mAh\*2)  
TYPE-C output 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A PPS 3.3V-11V-3A(33W)  
TYPE-C input: 5V-3A/9V-2.22A/12V-1.67A, (20W)  
USB-A output : 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A (22.5W)  
C+A output : 5V/3A  
Product size : 105\*63\*26mm  
Material quality : Fireproof ABS+PC  
LED digital display



## PB-22

130W large capacity fast charging powerbank

Capacity: 20000mAh (21700/5000mAh\*4)  
TYPE-C1 output: 5V-3A/9V-3A/12V-3A/15V-3A/20V-5A,(100W)  
TYPE-C1 input: 5V-3A/9V-3A/12V-3A/15V-3A/20V-3A (60W)  
TYPE-C2 output : 5V-3A/9V-3A/12V-2.5A,(30W)  
USB-A output : 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A, (22.5W)  
C2+A output : 30W (MAX)  
C1+C2+A output : 130W(MAX)  
Product size : 132\*82\*26mm  
Material quality : Fireproof ABS+PC  
PD130W, dual fast charging, LED digital display



## PDB-577

Type-C Cable and Lightning cable

Type-C input:DC5V/3A 9V/3A 12V/3A  
Copper Pins Output:DC5V/2A 9V/2A 12V/1.5A Max  
Total Output: 36W Max  
Copper Pins input:DC 5V/3A 9V/2A 12V/1.5A  
Power bank 10000mAh \*2  
Input (Type-C port): 5V/3A 9V/2A 12V/1.5A  
Output (Type-C port): 5V/3A9V/2.2A12V/1.67A10V/22.5A (22.5W)  
Output (Type-C Built-in cable): 5V/3A 9V/2.2A 12V/1.67A 10V/22.5A (22.5W)  
Output Lightning cable: 5V/2.4A 9V/2.2A  
Total Output: 5V/3A max  
Wireless Output :15W  
Material:ABS+PC



## PDB-574

Type-C input:DC5V/3A 9V/3A 12V/3A  
Copper Pins Output:DC5V/2A 9V/2A 12V/1.5A Max  
Total Output: 36W Max  
Copper Pins input:DC 5V/3A 9V/2A 12V/1.5A  
Power bank 10000mAh \*3  
Input (Type-C port): DC 5V/3A 9V/2A 12V/1.5A  
Output (Type-C port): DC 5V/3A9V/2.2A12V/1.67A 10V/22.5A (22.5W)  
Output (Type-C Built-in cable):DC 5V/3A 9V/2.2A 12V/1.67A 10V/22.5A (22.5W)  
Total Output:DC 5V/3A max  
Wireless Output :15W  
Material:ABS+PC  
Size: 147 mm\*87mm\*102mm



## PB-B19A/B/C

Portable Dual-Port Power Bank

Watch Charger: 5V/0.5A/2.5W  
Capacity: 5000mAh / 3.6V / 18W  
USB-C Female Input: 5V/2A,9V/2A,12V/1.5A(18W)  
Lightning Output: 5V/2.4A,9V/2.22A,12V/1.67A(20W)  
USB-C Male Input: 5V/2.4A,9V/2A,12V/1.5A(18W)  
USB-C Male Output: 5V/2.4A,9V/2.2A,12V/1.67A (20W)



## PB-B19

Powerbank Combination

USB-C input: 5V/2A  
Lightning/Type-C output: 5V2.4A MAX  
Capacity: 4500mAh 3.6V / 18W  
Material quality: PC+ABS (fireproof)  
Product size: 79.4x45x29mm  
Charging base size: 112x90x125mm  
Output Port: Type-C/Lightning, support usage in the same time.



## PDB-573

Type-C input:5V/3A 9V/3A 12V/3A  
Copper Pins Output:5V/2A 9V/2A 12V/1.5A Max  
Total Output: 36W Max  
Copper Pins input: 5V/3A 9V/2A 12V/1.5A  
Power bank 10000mAh \*2  
Input (Type-C port): 5V/3A 9V/2A 12V/1.5A  
Output (Type-C port): 5V/3A 9V/2.2A 12V/1.67A 10V/22.5A (22.5W)  
Output (Type-C Built-in cable): 5V/3A 9V/2.2A 12V/1.67A 10V/22.5A (22.5W)  
Total Output: 5V/3A max  
Wireless Output :15W  
Material:ABS+PC  
Size: 117 mm\*87mm\*102mm



## PDB-572

Magnetic mobile power bank with wire

· Battery 10000mAh  
· Rated Power:37wh/3.7V  
Type-C Input : 5V/3A 9V/2A 12V/1.5A  
Type-C Output: 5V/3A/ 9V/2.2A 12V/1.67A 10V/2.25A Max  
Type-C Cable Output : 5V/3A/ 9V/2.2A 12V=1.67A 10V/2.25A Max  
Wireless Output :15W  
Material:ABS+PC  
Size: 90 mm\*63.3mm\*27.5mm  
Weight: 201g



## PDB-571

### Rotating bracket magnetic mobile power supply

Capacity:10000mAh  
Wireless Output: 5W, 7.5W, 10W, 15W  
Type-C Input: 5V/3A 9V/2A 12V/1.5A(18W)  
Type-C Output: 5V/3A 9V/2.22A 12V/1.67A(20W)  
USB-A Output: 5V/3A 9V/2A 10V/2.25A(SCP) 12V/1.5A(22.5W)  
Material:ABS+Zinc alloy+aluminum alloy  
Size: 104mm\*68mm\*16.5mm



## PDB-569

### Qi2 Magnetic mobile power bank

Capacity:10000mAh  
Wireless Output: 5W, 7.5W, 10W, 15W  
Type-C Output: 5V-3A/9V-3A/10V-2.25A/12V-2.5A/15V-2.33A (35W)  
Type-C Cable Output: 5V-3A/9V-3A/10V-2.25A/12V-2.5A /15V-2.33A (35W)  
Type-C Input: 5V-3A/9V-2.22A/12V-1.67A  
Type-C Cable Input: 5V-3A/9V-2.22A/12V-1.67A  
Material:ABS+PC  
Size: 107.5\*69\*20mm



## PDB-564

### Magnetic suction mobile power supply with bracket

Battery capacity: 10000mAh/3.85V/38.5Wh  
Type-C input: 5V/3A 9V/2A  
Type-C OUT: 5V/2.4A 9V/2.22A 12V/1.67A (20W) Wireless charging output: 15W/10W/7.5W/5W  
Size:101mm\*66.5\*18mm  
Weight: 181g  
material quality: PC+ABS+leather



## PDB-563

### Three in one magnetic suction wireless charging

Battery capacity: 10000mAh/3.85V/38.5Wh  
Type-C input: 5V/3A 9V/2A  
Type-C OUT: 5V/2.4A 9V/2.22A 12V/1.67A (20W)  
Wireless charging output : 15W/10W/7.5W/5W (iWatch) : 2.5W  
Size: 101\*66.5\*18mm  
Weight: 214  
material quality: PC+ABS+leather



## PDB-570

### Comes with a built-in magnetic power bank and digital display

Capacity:10000mAh  
Wireless Output: 5W, 7.5W, 10W, 15W  
Watch wireless charging: 2.5W  
Type-C Output: 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
Type-C Cable Output: 5V-3A/9V-2.22A/10V-2.25A/12V-1.67A  
Type-C Input: 5V-3A/9V-2A/12V-1.5A  
Type-C Cable Input: 5V-3A/9V-2A/12V-1.5A  
Material:ABS+PC  
Size: 112\*71\*18mm



## PDB-567

### Qi2 Magnetic mobile power bank

Capacity: 10000mAh  
Battery Type: Li-polymer  
Type-C Input: DC 5V/9V-3A,12V-2.5A,15V-2A, 20V-1.5A (30W)  
Type-C Output: DC 5V/9V-3A,12V-2.5A,15V-2A, 20V-1.5A (30W)  
PPS: 5-11V/3A  
Wireless Output: 5W, 7.5W, 10W, 15W  
Total: PD15W+5W(Wireless)  
Size: 105\*65\*16MM  
Weight: 191g  
Material: aluminium alloy+ ABS



## PDB-562

### Five in one magnetic suction mobile power supply

Size:107\*69.8\*14.5mm Weight: 177g  
Battery capacity: 5000mAh/3.85V/19.25Wh  
Material: ABS+zinc alloy  
Color black/white/purple/silver  
Wireless) : 15W/10W/7.5W/5W (iWatch) : 2.5W  
YUSB-C Cable OUT: 5V/2.4A 9V/2.22A 12V/1.67A (20W)  
Lighting Cable OUT:5V/2A  
Type-C Input: 5V3A 9V/2A 12V/1.5A (18W)  
Type-C OUT: 5V/3A 9V/2.22A 12V/1.67A (20W)



## PDB-561

### Five in one magnetic suction mobile power supply

Size: 107mm\*69.8mm\*19.5mm Weight: 208g  
Battery capacity: 10000mAh/3.85V/38.5Wh  
Material: ABS+zinc alloy  
Color: black/white/purple/silver  
Wireless) : 15W/10W/7.5W/5W (iWatch) : 2.5W  
USB-C Cable Out:5V/2.4A 9V/2.22A 12V/1.67A (20W)  
Lighting Cable OUT:5V/2A  
Type-C Input: 5V/3A 9V/2A 12V/1.5A (18W)  
Type-C OUT: 5V/3A 9V/2.22A 12V/1.67A (20W)



## PDB-566

### Qi2 Magnetic mobile power bank

Capacity: 10000mAh  
Battery Type: Li-polymer  
Type-C input : DC 5V-2.4A, 9V-2.0A (18W)  
Type-C output : DC 5V-2.4A, 9V-2.22A, 12V-1.67A (20W)  
PPS: 5-11V/3A  
Wireless Output: 5W, 7.5W, 10W, 15W  
Total: PD15W+5W(Wireless)  
Size: 105\*65\*16MM  
Weight: 191g  
Material: aluminium alloy + ABS



## PDB-565

### Mini magnetic power bank with built-in cable

Capacity: 10000mAh  
Battery Type: Li-polymer  
Wireless Output: 5W, 7.5W, 10W, 15W  
Watch wireless charging: 2.5W  
Type-C/Type-C Cable Input: 5V3A 9V/2A 12V/1.5A (18W)  
Type-C/Type-C Cable OUT: 5V3A 9V/2.22A 12V/1.67A (20W)  
PPS: 5V-11V/2A  
Size:99\*64.5\*17.5mm  
Weight: 191g  
Material: kirsite+ ABS+Braided thread+silicone



## PDB-560

### Ultra thin magnetic suction mobile power supply

Capacity : 5000mAh /3.85V/19.25Wh  
TYPE-C Output : 5V-3A/9V-2.22A/12V-1.67A , (20W)  
TYPE-C Input:5V-2.4A/9V-2A  
Wireless Output : 15W  
Size : 105\*66\*8.9mm  
Material : Aluminum alloy+ABS+PC



## PDB-559

### Magnetic suction mobile power supply

Capacity : 10000mAh/3.85/38.5Wh  
TYPE-C Output : 5V-3A/9V-2.22A/12V-1.67A , (20W)  
TYPE-C Input:5V-2.4A/9V-2A  
Wireless Output : 15W  
Size : 105\*66\*14.6mm  
Material : Aluminum alloy+ABS+PC

## PDB-558

Magnetic suction mobile power supply

Capacity : 5000mAh/ 3.7V / 18.5Wh  
 Battery Type : Li-polymer  
 Type-C Input : DC 5V-2.4A, 9V-2.0A (18W)  
 Type-C Output : DC 5V-2.4A, 9V-2.22A, 12V-1.67A (20W)  
 Wireless Output : 15W  
 Size : 103 x 64 x 10.5MM  
 Weight : 124g  
 Material : Aluminum alloy+silicone



## PDB-557

Magnetic suction mobile power supply

Capacity : 10000mAh / 3.7V / 37Wh  
 Battery Type : Li-polymer  
 Type-C Input : DC 5V-2.4A, 9V-2.0A (18W)  
 Type-C Output : DC 5V-2.4A, 9V-2.22A, 12V-1.67A (20W)  
 Wireless Output : 15W  
 Size : 105 x 67 x 16MM  
 Weight : 198g  
 Material : Aluminum alloy+silicone



## PDB-554

Equipped with cable, large capacity, magnetic suction mobile power supply

capacity: Polymer cell 10000mAh 3.85V  
 TYPE-C cable output: 5V3A/9V2.22A/12V1.67A(20W)  
 TYPE-C cable input: 5V-2A/9V-2A/12V-1.5A  
 Lightning cable output: 5V-2.4A/9V-2.22A/12V-1.67A(20W)  
 TYPE-C input: 5V-2A/9V-2A/12V-1.5A  
 USB-A output: 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A(22.5W)  
 Wireless charging output : 15W MAX  
 material quality : Fireproof ABS+PC  
 Product size : 113\*72\*22mm  
 1.LED digital display



## PDB-556/A

30W Digital display with bracket magnetic suction mobile power supply

capacity: Polymer cell 10000mAh 3.85V  
 TYPE-C output: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A, (30W)  
 TYPE-C input: 5V-3A/9V-2.22A/12V-1.5A, (20W)  
 Wireless charging output : 15W MAX  
 material quality : Fireproof ABS+PC+zinc alloy bracket  
 Product size : 111\*72\*19.5mm  
 1.LED digital display



## PDB-555/A

30W Wired magnetic suction mobile power supply

capacity: Polymer cell 10000mAh 3.85V  
 TYPE-C output: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A, (30W)  
 TYPE-C input: 5V-3A/9V-2.22A/12V-1.5A, (20W)  
 TYPE-C cable output: 5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A, (30W)  
 Wireless charging output : 15W MAX  
 material quality : Fireproof ABS+PC+zinc alloy bracket  
 Product size : 111\*72\*19.5mm  
 1.LED digital display



## PDB-554A

Equipped with cable, large capacity, magnetic suction mobile power supply

capacity: Polymer cell 20000mAh 3.85V  
 TYPE-C cable output: 5V3A/9V2.22A/12V1.67A(20W)  
 TYPE-C cable input: 5V-2A/9V-2A/12V-1.5A  
 Lightning cable output: 5V-2.4A/9V-2.22A/12V-1.67A(20W)  
 TYPE-C input: 5V-2A/9V-2A/12V-1.5A  
 USB-A output: 4.5V-5A/5V-4.5A/5V-3A/9V-2A/12V-1.5A(22.5W)  
 Wireless charging output : 15W MAX  
 material quality : Fireproof ABS+PC  
 Product size : 129\*73\*30mm  
 1.LED digital display



Vina International Holdings LTD  
PRODUCT CATALOG



www.vinacn.com

Google Search

I'm Feeling Lucky



Sales@vinacn.com



VINA@factorycharger



chinavina



13926566146



VINA International Holdings LTD



13926566146



VINA International Holdings LTD



VINA International Holdings LTD(VINA)

